
Murraypro the whole picture

SDI-DAC

Another Low Cost Quality Product

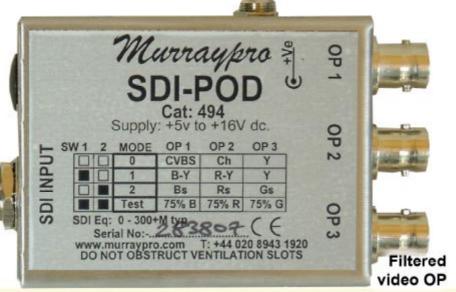


Robust stainless steel case provides total protection.

Your requirements for a cost effective, monitoring quality, DAC are totally satisfied when Murraypro's new SDI-DAC is specified. Whether you are feeding a "Heritage" monitor from an SDI source, or simply driving an older Model VTR, discerning Engineers fully appreciate the DAC's filtered 8 bit video outputs, which significantly reduce all unwanted out-of-band components. With internal equalisation for a full 300+M of Broadcast cable, the DAC effortlessly auto-switches

between 50Hz and 60Hz SDI sources, whilst the internal diagnostic LEDs flag the detected modes. The required video output format is preset on a DIP switch providing:- YUV, RGsB, Y+C or CVBS video modes, with enhanced bandwidth and reduced cost over our previous model,

A 3 pin IEC Universal mains power supply is provided, although the SDI-DAC module itself accepts unregulated dc power between +5V & 16V, and is ideal for use with 7 or 14V Lithium battery packs.

Outline Specification



Composite Bars 2T Pulse

5.5MHz Sweep

- * Auto-switching SDI 50/60Hz.
- * Filtered BNC video outputs.
- * +5 to +16V dc power

- * YUV, RGsB, Y+C & CVBS modes
- * Stainless case 75 x 55 x 25mm.
- * Universal 3 pin IEC PSU.

Murraypro

8, Glamorgan Road, Hampton Wick, KT1 4HP UK